
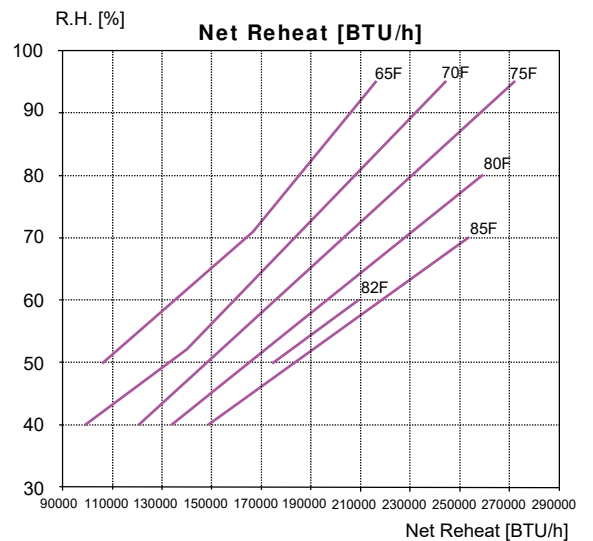
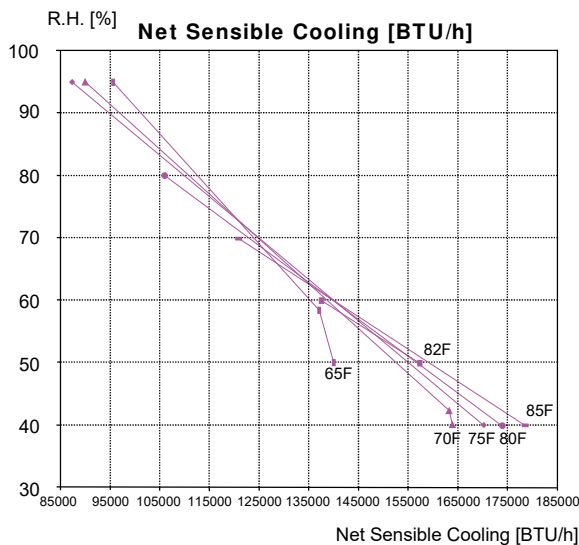


DCA 11000A DEHUMIDIFICATION SYSTEM

PERFORMANCE

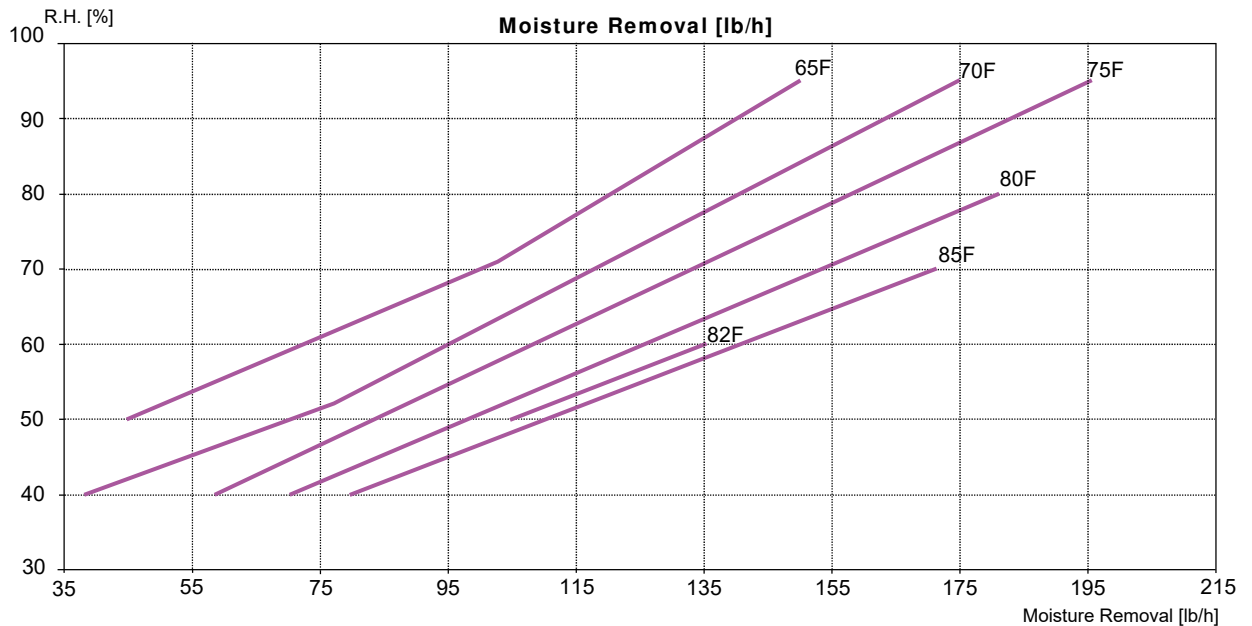

Performance	82DB / 50% R.H.	82DB / 60% R.H.	Notes
Moisture Removal, LB/HR	104.8	135.2	1
Net Sensible Cooling, MBH	157.3	137.5	2
Net Reheat, MBH	174.5	209.2	3
Water Heating - A, MBH (Water Heating Models Only)	166.4	172.3	4,6
Water Heating - B, MBH (Water Heating Models Only)	166.4	172.3	4,6

Notes:

1. Reheat mode assuming 1050 BTU/lb
2. Cooling mode with remote condenser at 95F.
3. Defined as sum of latent and compressor input. Use dehumidifier for supplemental heat only.
4. Assuming 85F entering water temperature.
5. For conditions and data not shown contact the factory.
6. For pool water usually only circuit A is required.

CAUTIONS: The reheat capacity rating includes latent recovery and heat of compression. It is recommended that dehumidifier be used for supplemental heat only. The cooling capacity is based on an ambient temperature of 95°F. As outside conditions vary, so will the performance of the dehumidifier. Ratings are subject to change without notice.

DCA 11000A DEHUMIDIFICATION SYSTEM

DESIGN SPECIFICATIONS

Electrical	208/230V	460V	575V
Phase/Hz	3/60	3/60	3/60
Compressor M.B.H. A/B	137 / 137	135 / 135	136 / 136
Compressor RLA A/B	48.1 / 48.1	18.6 / 18.6	14.7 / 14.7
Compressor LRA A/B	245 / 245	125 / 125	100 / 100
Blower Motor HP	7.5	7.5	7.5
Blower Motor FLA	22.4	10.8	8.5
Unit FLA	120.8	49.0	38.8
Maximum Fuse Size	175	70	50
Minimum Circuit Amp.	132.8	53.7	42.5
Operating KW	26.55	26.23	26.52

CFM.....	11000
External Static Pressure.....	1.00" H ₂ O
Refrigerant.....	R-410A (Factory Charged A/B 65 lbs.)
Compressor Type.....	Dual Scroll
Filter (Quantity: 6).....	20" x 25" x 4" Pleated
(Quantity: 3).....	20" x 20" x 4" Pleated
Drain Connection.....	1" Bar Drain
DCA 11000A Weight.....	3500 lbs.
Liquid Inlet A/B [inches O.D.] (up to 50') ¹	0.875 / 0.875
Hot Gas Outlet A/B [inches O.D.] (up to 50') ¹	1.125 / 1.125
Water Inlet A/B [inches O.D.].....	1.625 / 1.625
Water Outlet A/B [inches O.D.].....	1.625 / 1.625
Water Flow A/B G.P.M. ²	21.0 / 21.0
Pressure Drop A/B (Ft. WC) ²	8.5 / 8.5

¹ Over 50ft contact factory

² Water Flow data based on 60% RH + Return Air 82°F and Pool Water at 85°F

STANDARD FEATURES

- MET Laboratory Safety Listed To UL 1995
- 3 Year Part Warranty
- Dual Refrigeration Circuit
- Dual Scroll Compressor
- Powder Coated, Galvannealed Steel Cabinet
- Low Ambient Head Pressure Control
- Remote Condenser Ready
- Rifle Tube Refrigeration Coils
- TEFC Blower Motor
- Stainless Steel Condensate Drain Pan
- Standard Microprocessor Control System
- Motorized Evaporator Bypass Damper
- ElectroFin Coated Coils

OPTIONAL FEATURES

- Right Side Component Service Access
- Top or Bottom Discharge (Not Field Convertible)
- Outdoor Installation Package
- Outdoor Make Up Air Assembly with Damper & Filter
- External Static Upgrade
- Water Cooled Condenser For Water Heating Or A/C Available
- Remote Ready Delete
- Defrost Timer Package
- Control Options
- Space Heating Options Available
- Other Options Available